

Engine test stand

Application

Engine test stand for evaluation of the exhaust gas.

Temp.: 250°C – 600°C

Pressure: only a few bar

Medium: exhaust gas

Problem

The gaskets used up to now couldn't resist to the alternating loads caused by temperature changes.



GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS


Engine test stand

Solution

Now novamica® THERMEX is used in the application. The material is perfectly suitable for alternating loads caused by temperature changes.

Result

The application works reliably with novamica® THERMEX.

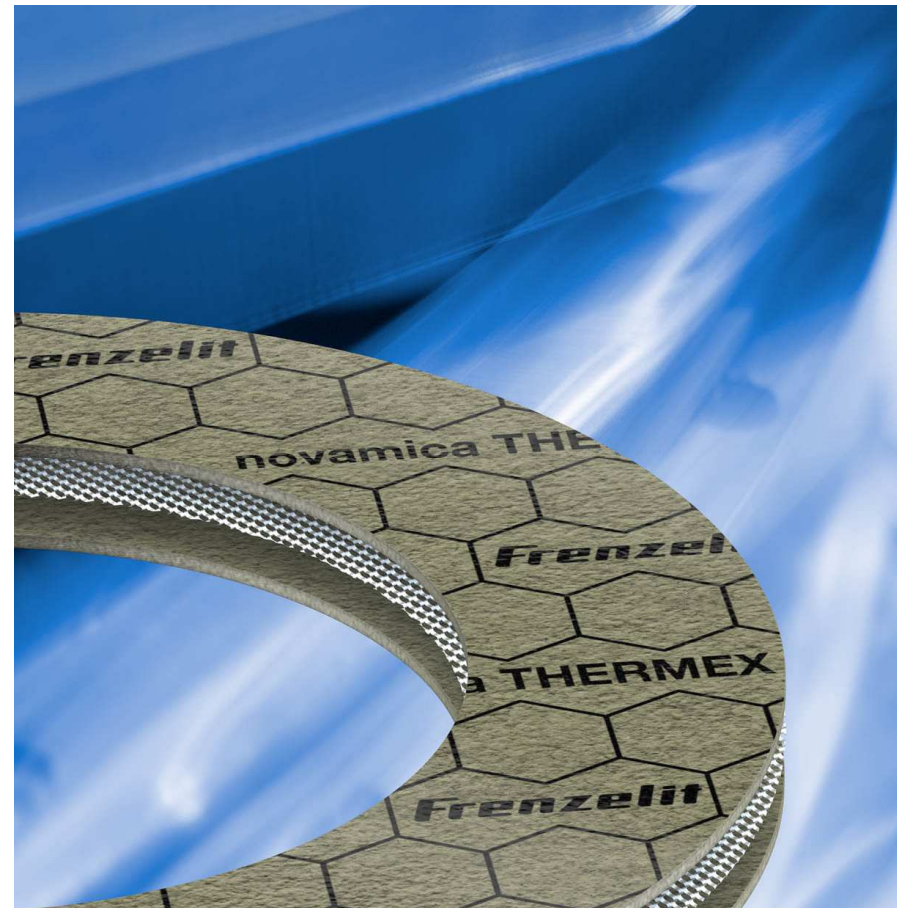

GASKETS

TECHNICAL TEXTILES

EXPANSION JOINTS

INSULATION

NEW MATERIALS